

SINGLE 1000 BASE-TX LAN MAGNETIC

P/N: LG1P109N LF DATA SHEET

Page :1/2

Feature



- Designed to meet IEEE 802.3ab requirement, including 350uH OCL with 8mA bias.
- Compliance with ROHS requirements.
- Operating temperature range: 0°C to +70°C.
- Storage temperature range: -25°C to +85°C.


Electrical Specifications @ 25°C

Part Number	Turns Ratio (±5%)		OCL (uH Min) @100KHz/0.1V with 8mA DC Bias	Insertion Loss (dB Max)	HI-POT (Vrms)
	TX	RX		1-100MHz	
LG1P109N LF	1CT:1CT	1CT:1CT	350	-1.1	1500

Continue

Part Number	Return Loss (dB Min)			Cross talk (dB Min)			CMR (dB Min)		
	30MHz	50MHz	80MHz	0.3-30MHz	30-60MHz	60-100MHz	1-30MHz	30-60MHz	60-125MHz
LG1P109N LF	-15	-13	-11	-40	-35	-30	-30	-25	-20

Schematic


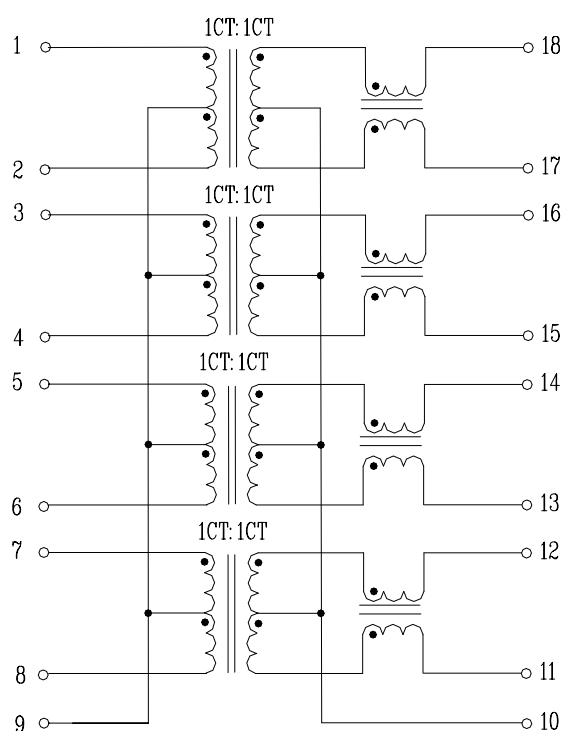


SINGLE 1000 BASE-TX LAN MAGNETIC



P/N: LG1P109N LF DATA SHEET

Page :2/2

Mechanical

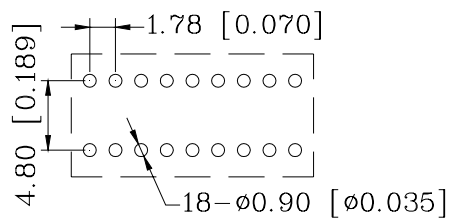

SUGGESTED PAD LAYOUT

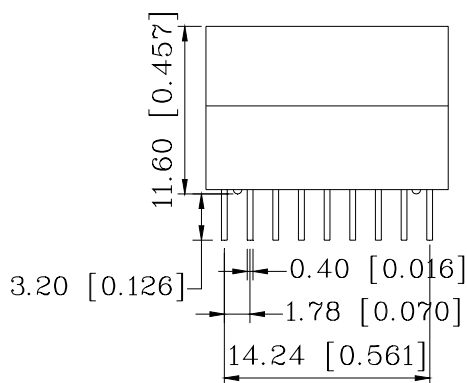

Units: mm[Inches] Tolerances : xx.x0±0.25[0.010]
0.xx±0.05[0.002]