

- Designed to meet IEEE 802.3u requirement, including 350uH OCL with 8mA bias.
- Comply with ROHS & Halogen Free requirements.
- Operating temperature range: 0 to +70 .
- Storage temperature range: -25 to +85 .




Electrical Specifications @ 25								
Part Number	Turns Ratio (±5%)		Insertion loss (dB Max)	Return loss (dB Min)			Cross talk (dB Min)	
	(12-11):(1-2)	(8-7):(5-6)		30MHz	60MHz	80MHz	0.3-60MHz	60-100MHz
NH15 LF	1CT:1CT	1CT:1CT	-1.15	-18	-14	-12	-45	-35

Continue							
Part Number	OCL (uH Min) @ 100KHz/0.1V with 8mA DC Bias	HI-POT (Vrms)	Cw/w (pF Max)	Mech	DCMR (dB Min)		
					30MHz	30MHz	30MHz
NH15 LF	350	1500	28	NH-A	-40	-40	-40

For customized parts or more detailed information, please log on www.bothhandusa.com or write to sales@bothhandusa.com

Mechanicals

NH-A

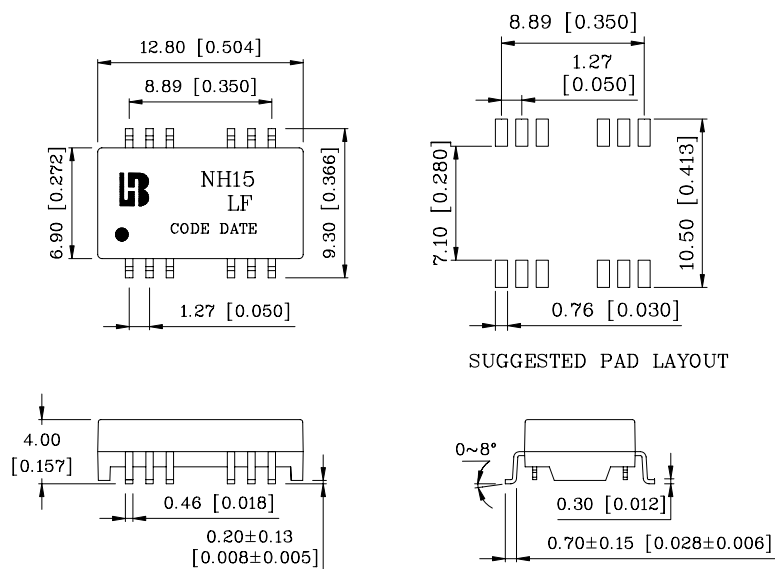

Units: mm[Inches] Tolerances: xx.x0±0.25[0.010]
0.xx±0.05[0.002]

Specification	Packing Manner	Q'ty per Tube/Reel	Q'ty/ Inner box	Q'ty/ Carton
NH-A	REEL	800	800	8000

Schematics

NH15 LF

