

With 10/100/1000 Base-T Magnetics Module

Meets IEEE 802.3 Specification

ROHS peak reflow temperature rating 245°C.

10/100/1000 Base-T, Surface Mount Type, Open Header.


Operating temperature range: -40°C to +85°C

Storage temperature range: -40°C to +125°C

Electrical Specifications 25°C.

OCL(uH Min) 100KHz 0.2V	Turns Ratio	Insertion Loss (dB Max)	Return Loss (dB Min)		Cross talk (dB Min)		CMRR (dB Min)	HI-POT (Vrms)
With 8mA DC Bias	TX=1CT:1CT	0.5-100MHz	0.5-40MHz	40.1-100MHz	0.5-40MHz	40.1-100MHz	0.5-100MHz	0.5-100MHz
350		-1.1	-18	-12+20 * log(f/80)	-35	-33+20 * log(f/50)	-30	1500

Mechanical:

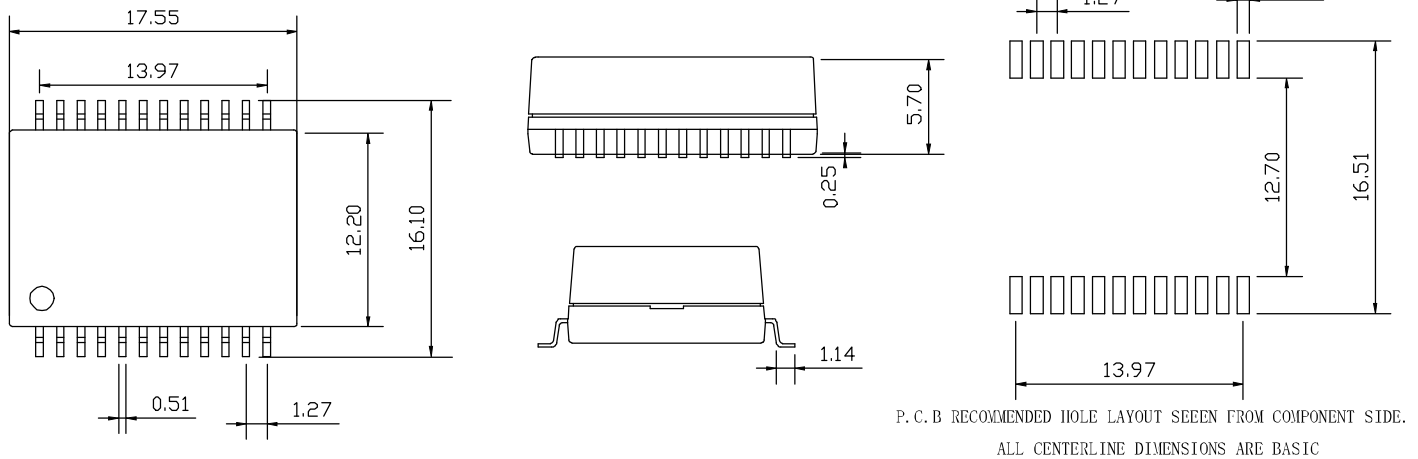

Schematic:

