


**10/100/1000 BASE –TX VOICE OVER IP
MAGNETICS MODULE
P/N: VP2009M HF DATA SHEET**



Feature

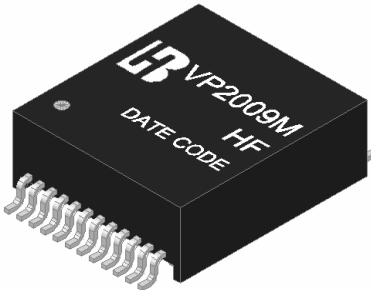

- IEEE 802.3af/ANSI X3.263 compliant performance.
- 350mA current capability.
- Designed for IP phone or switch applications.
- Compact footprint.
- The model offer Auto MDIX capability.
- Complying with ROHS & Halogen Free requirements.
- Operating temperature range: -40°C to +85°C.
- Storage temperature range: -40°C to +85°C.


Electrical Specifications @ 25°C

Part Number	Turns Ratio (±5%)		OCL (uH Min) @100KHz/100mV with 8mA DC Bias	Cross talk (dB Min)			HI-POT (Vrms)
	TX	RX		30MHz	60MHz	100MHz	
VP2009M HF	1CT: 1	1CT: 1	350	-43	-37	-33	1500

Continue

Part Number	Insertion Loss (dB Max)	Return Loss (dB Min)				DCMR (dB Min) TX/RX		
	1-100MHz	1-30MHz	40MHz	50MHz	60-80MHz	30MHz	60MHz	100MHz
VP2009M HF	-1.1	-16	-14	-13	-12	-43	-37	-33


Schematic

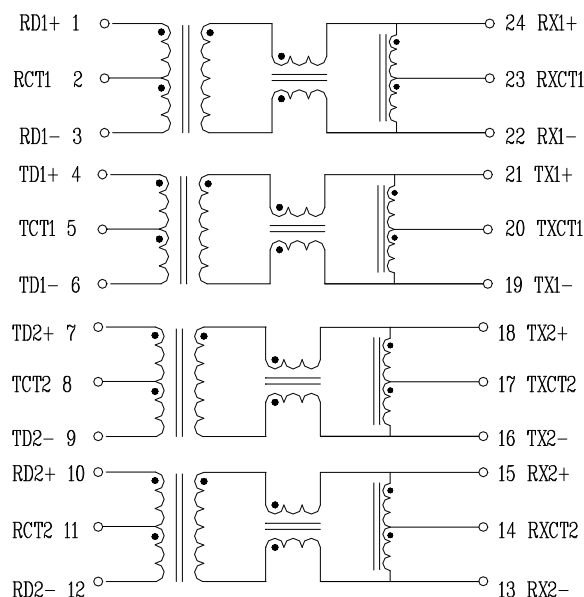

10/100/1000 BASE –TX VOICE OVER IP
MAGNETICS MODULE
P/N: VP2009M HF DATA SHEET



Mechanical

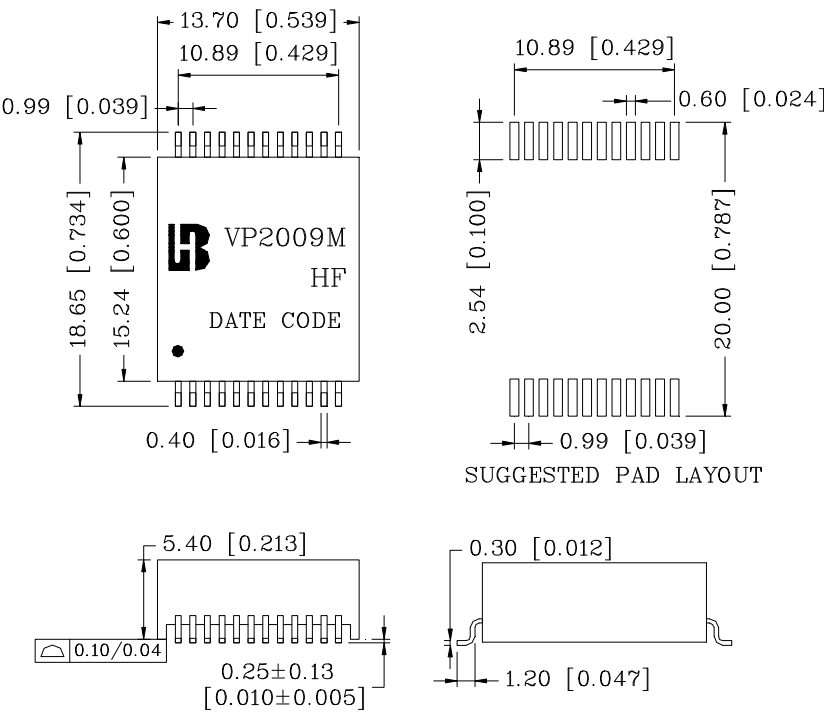

Units: mm[Inches] Tolerances: xx.x0±0.25[0.010]
0.xx±0.05[0.002]