

**P/N:TA200-25B DATA SHEET**

Page : 1/1

Feature

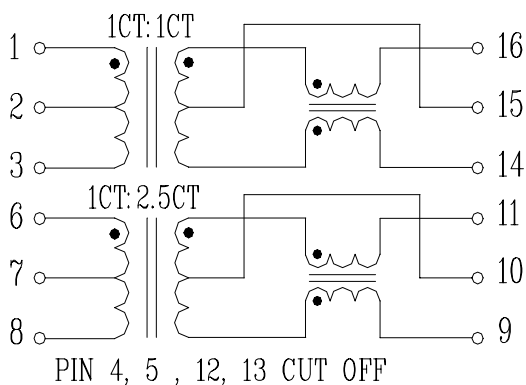
- Low profile package 16 PIN DIP package to meet IEEE 802.3&10-BASE T specification.
- Low leakage inductance and winding capacitances for fast rise time.
- High isolation voltages to comply with international safety requirements for LANS.
- Operating temperature range: 0°C to +70°C.
- Storage temperature range: -25°C to +125°C.

Electrical Specifications @ 25°C

Part Number	Turns Ratio (±3%)		OCL (uH Min)	L.L (μ H Max)	C _{ww} (pFMax)
	1-3:16-14	6-8:11-9			
TA200-25B	1CT:1CT	1CT:2.5CT	200/35	0.4	15

Continue

Part Number	DCR (Ω Max)	Insulation resistance (MΩ)	HI-POT (Vrms)
	TA200-25B		

Schematic**Mechanical**