

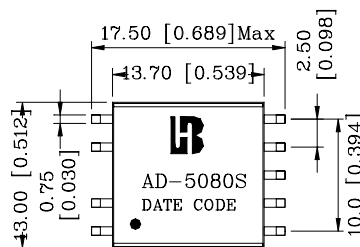
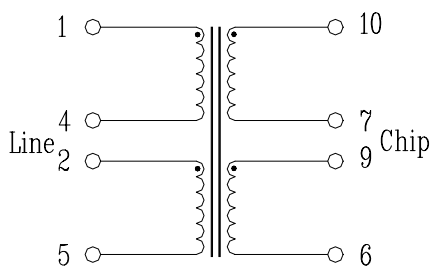


**P/N: AD-5080S DATA SHEET****Feature**



- HI-POT of 1500Vrms.
- Operating temperature range: 0°C to +60°C.
- Storage temperature range: -25°C to +75°C.

Electrical Specifications @ 25°C

Part Number	Turn Ratio (±1%) (10-6):(1-5)	OCL (uH ±5%) (1-5),(2+4)short	L.L (uH Max) (1-5),(2+4,9+7,10+6)short	C _{ww} (pF Max) (1-5):(10-6)	DCR (Ω Max)	
					(10-6),(7+9)	(1-5),(2+4)
AD-5080S	1:2	409.5	6.5	65	0.66	1.32

Schematic**Mechanical**

Suggested PAD Layout



Units: mm[Inches] Tolerances: xx.x0±0.25[0.010]
0.xx±0.05[0.002]