


FIBER CHANNEL DUAL TRANSFORMER

P/N:TS-WT150 DATA SHEET


Feature



- Designed for FDDI & ATM application.
- 16 PIN surface mountable.
- Frequency range 2 MHz to 266 MHz.
- Operating temperature range: 0°C to +70°C
- Storage temperature range: -25°C to +125°C.

Electrical Specifications @ 25°C							
Part Number	Turns Ratio (±5%)	OCL (uH Min) @ 100KHz/0.2V	Cw/w (pF Max)	L.L (uH Max)	DCR (Ω Max)	Rise Time (20%~80%) (nS Max)	HI-POT (Vrms)
TS-WT150	1:1	15	5	0.10	0.2	0.8	1500

Schematic

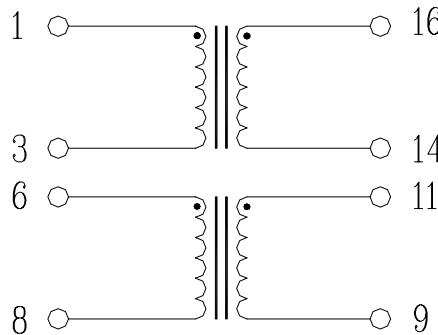

Mechanical

