

FEATURES

- Cispr 22'B', Fcc'B' Compliance
- Charge for 12V Lead-Acid Battery Packs
- Efficiency Over 73%
- Over-Power Protective Installation
- Over-Voltage Protective Installation
- Short-circuit Protective Installation
- Protection Type: Auto-Recover
- IEC-320 Receptacle 3P



SPECIFICATION

Item	Model	EA1046
Fast Charging		3000mA Typical Charge Current to Battery Pack During Battery Voltage Less Than 14.7V
Float Charging		After Fast Charge Terminated The Charge Voltage Change to 13.8V for Float Charging to Maintain Battery Capacity
Input Voltage		AC 90~264V
Input Frequency		47~63Hz
Input Current		1.6A Maximum
Inrush Current		80A Maximum
Line Regulation		2% Maximum
Efficiency		75% Typical
Temperature Coefficient		0.05%/°C
Over-Voltage Protection		18V Maximum
Operating Temperature		0~40°C
Storage Temperature		-20~85°C
Safety Description		Designed to meet UL, CUL, CE

(*): Under Development (I/P): In Process


Bothhand USA. e-mail: sales@bothhandusa.com <http://www.bothhand.com>

462 Boston St - Topsfield, MA 01983 - Phone: 978-887-8050 - Fax: 978-887-5434

ORDERING INFORMATION

EA1046 - 1 A
Output Plug List

MECHANICAL

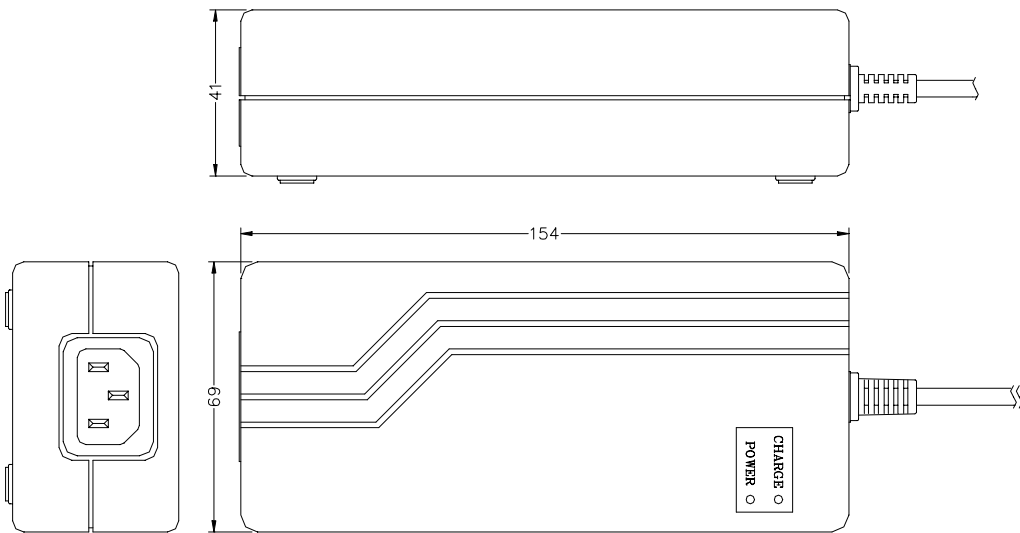

Unit: m.m.

