

FEATURES

- Vcci'B', Fcc'B' Compliance
- Light Weight: 110g only
- Efficiency Over 70%
- Over-Voltage Protective Installation
- Short-circuit Protective Installation
- Protection Type: Auto-Recover
- Operating Temperature 0°C~40°C




SPECIFICATION


Item \ Model	M1-7S03	M1-8S05	M1-10S05
Output Voltage	3.3V	5V	5V
Output Current	2.0A	1.6A	2.0A
Input Voltage	AC 90~132V		
Input Frequency	47~63Hz		
Input Current	0.3A Maximum		
Inrush Current	30A Maximum		
Line Regulation	2% Maximum		
Load Regulation	± 5%		
Ripple & Noise	50mV Maximum		
Efficiency	70% Typical	72% Typical	74% Typical
Temperature Coefficient	0.05%/°C		
Over-Voltage Protection	7V Maximum	10V Maximum	10V Maximum
Operating Temperature	0~40°C		
Storage Temperature	-20~85°C		
Safety Description	UL, CUL, T-MARK		

(*): Under Development (I/P): In Process

ORDERING INFORMATION

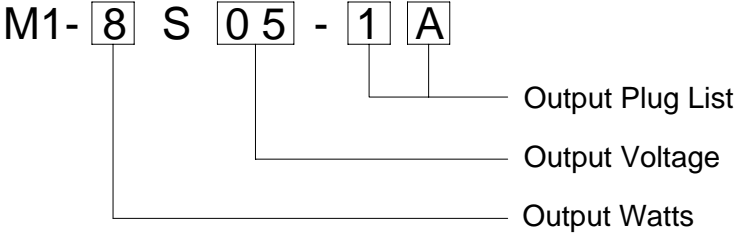

MECHANICAL

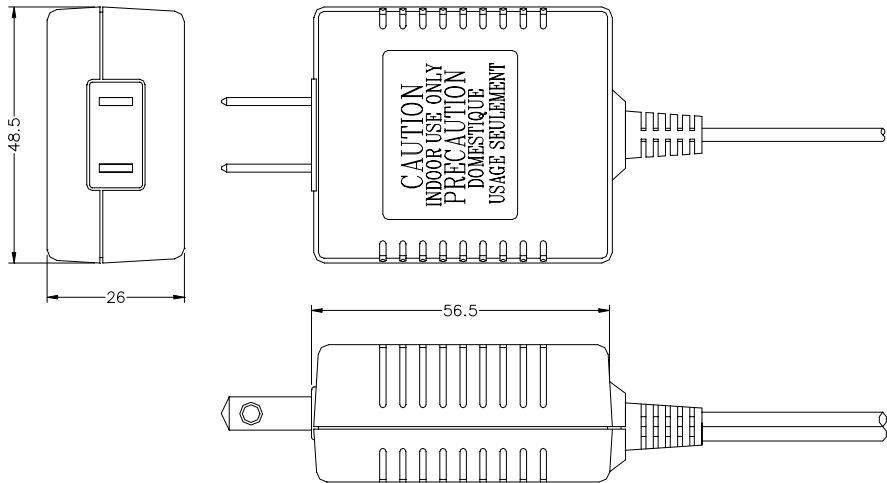

Unit: m.m.

Standard Output Cable:
M1-8S05: 20AWG, UL 2468, 1800mm.
Others: 18AWG, UL SPT-1, 1800mm.



Bothhand USA. e-mail: sales@bothhandusa.com <http://www.bothhand.com>

462 Boston St - Topsfield, MA 01983 - Phone: 978-887-8050 - Fax: 978-887-5434