



P/N: S4931 DATA SHEET

Feature





- Dual and single through hole models available.
- Models matched to leading transceiver ICs.
- Operating temperature range: 0°C to +70°C.
- Storage temperature range: -25°C to +125°C.

Electrical Specifications @ 25°C							
Part Number	Turns Ratio (±5%)	OCL (mH Min)	C _{w/w} (pF Max)	L.L (uH Max)	DCR (Ω Max)	PRI PINS	HI-POT (Vrms)
	1-2:3-4:5-6						
S4931	1:1:1	1.2	25	0.50	0.7	1-2	1500

Schematic

Mechanical

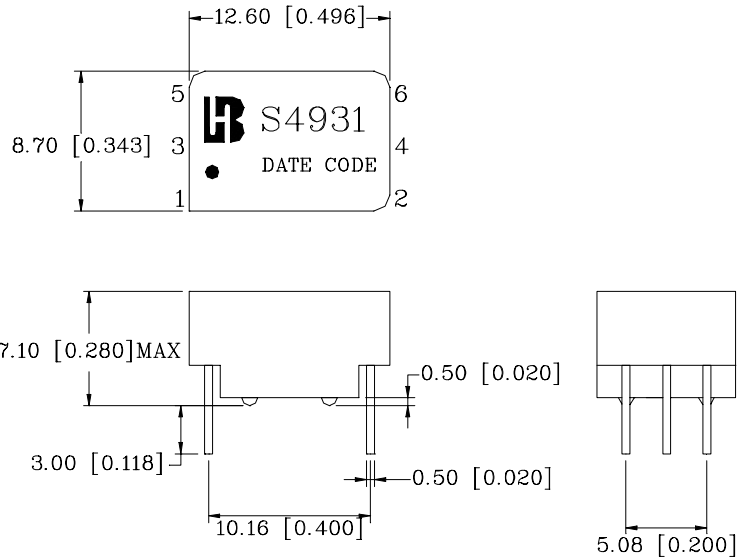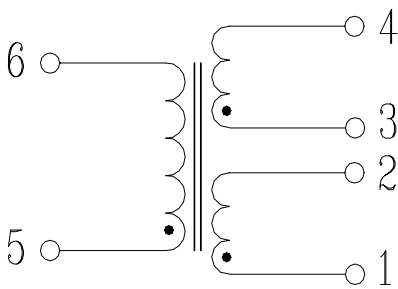

Units: mm [Inches] Tolerances: xx.x0±0.25 [0.010]
 0.xx±0.05 [0.002]