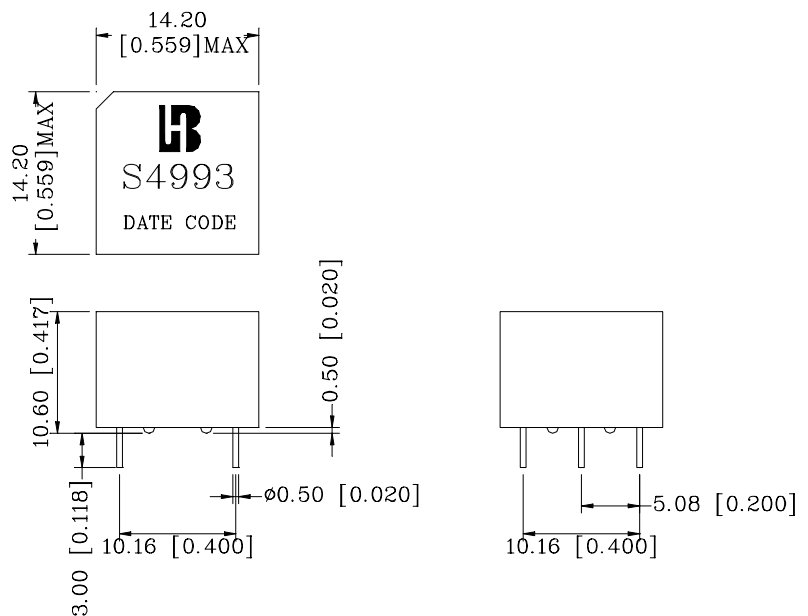
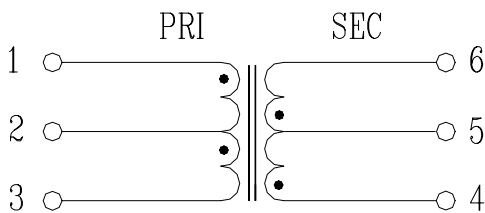


**P/N: S4993 DATA SHEET****Feature**

- Excellent longitudinal balance.
- Recognized by BABT and UL.
- Operating temperature range: 0°C to +70°C.
- Storage temperature range: -25°C to +125°C.

Electrical Specifications @ 25°C

Part Number	Turns Ratio (±2%)	OCL (mH Min)	C _{w/w} (pF Max)	L.L Sec (uH Max)	DCR (Ω Max)	CD Pri (pF Max)	HI-POT (Vrms)
S4993	1CT:1CT	22	100	5	2.4	42	2000

Schematic**Mechanical**

Units: mm [Inches]
 Tolerances: xx.x0±0.25 [0.010]
 0.xx±0.05 [0.002]