


**P/N:S5014 DATA SHEET****Feature**

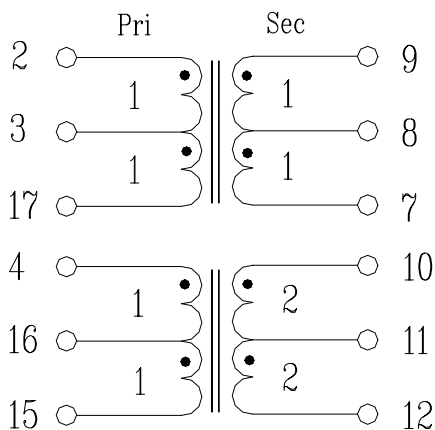
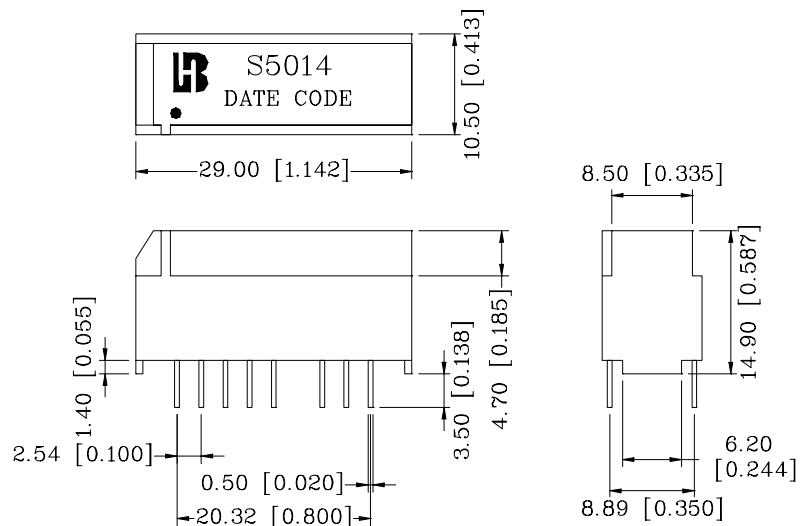
- Operating temperature range: 0°C to +70°C
- Storage temperature range: -25°C to +125°C.

**Electrical Specifications@25°C**

Part Number	Turns Ratio (±1%)		OCL (mH Min)	L.L. (uH Max)
		2-17:9-7	4-15:10-12	(2-17)&(4-15)
S5014	1CT:1CT	1CT:2CT	30	5

**Continue**

Part Number	C <sub>w/w</sub> (pF Max)	DCR (Ω Max)		HI-POT (Vrms)	
		(2-9)&(4-10)	(2-17)&(4-15)&(7-9)	10-12	(2-9)&(4-10)
S5014	150	2.5	4.5	1500	500

**Schematic****Mechanical**

Units: mm[Inches] Tolerance: xx.x0±0.25[0.010]  
0.xx±0.05[0.002]