



P/N: S5389 DATA SHEET

Feature




- Dual and single through hole models available.
- Models matched to leading transceiver ICs.
- Operating temperature range: 0°C to +70°C.
- Storage temperature range: -25°C to +125°C.


Electrical Specifications @ 25°C

Part Number	Turns Ratio (±5%)		OCL (mH Min) @100KHz/0.1V	C _{WV} (pF Max)	L.L (uH Max)	DCR (Ω Max) PRI&SEC	PRI PINS	HI-POT (Vrms)
	(2-6):(3-5)	(2-6):(1-5)						
S5389	1:1	1:1.26	1.5	40	0.40	0.7/0.9	2-6	1500

Schematic

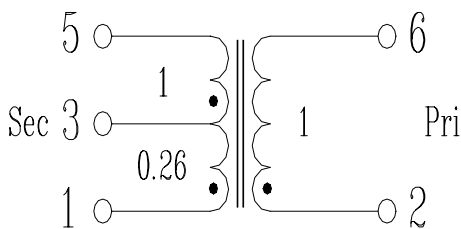

Mechanical

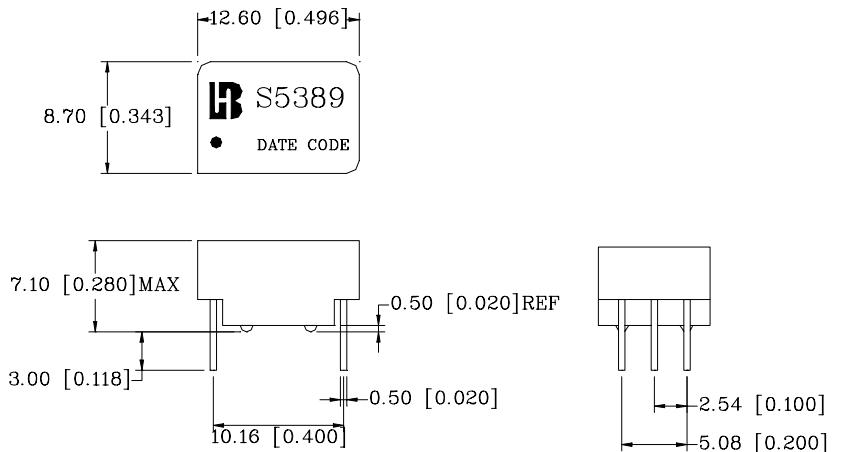

Units: mm [Inches] Tolerances: xx.x0±0.25 [0.010]
0.xx±0.05 [0.002]