



P/N: S5568 DATA SHEET

Feature

- Operating temperature range: 0 to +70 .
- Storage temperature range: -25 to +125 .




Electrical Specifications @ 25° C

Part Number	Turns Ratio (±3%)		OCL (mH Min) @0.1Vrms,10KHz PRI	HI-POT (Vrms)@60S
	(14-12):(1-2-3)	(5-7):(10-9-8)		
S5568	1CT:1.26	1:2CT	1.5	1500


Continue

Part Number	L.L (uH Max) @1MHz	C _{ww} (pF Max)	PRI Pins	DCR (ΩMax)		
				(14-12)=(5-7)	(10-9)=(9-8)	(1-2)=(2-3)
S5568	0.6	40	(14-12)& (5-7)	0.7		0.5

Schematic

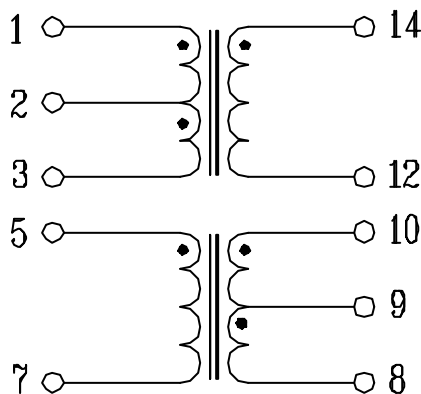

Mechanical

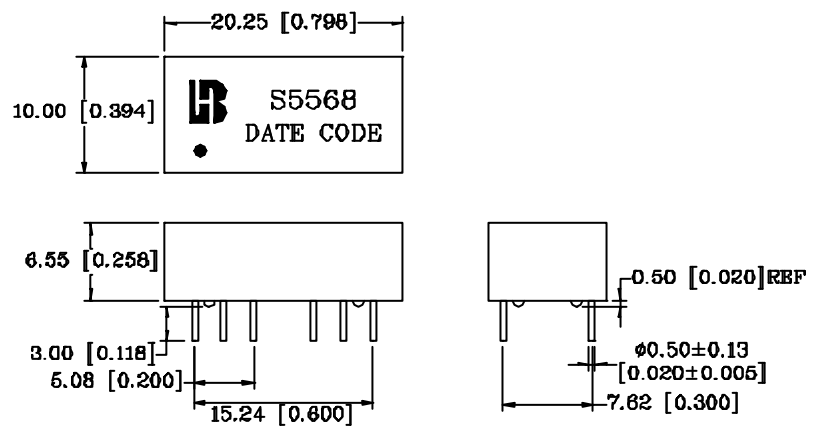

Units: mm[Inches] Tolerance: xx.x0±0.25[0.010]
0.xx±0.05[0.002]