




P/N: S5833H LF DATA SHEET

Feature





- Lead free for external pins.
- Operating temperature range: 0 to +75
- Storage temperature range: -25 to +125 .

Electrical Specifications @ 25°C

Part Number	Turns Ratio (±5%) (1-5): (10-6)	OCL (mH Min)	L.L (uH Max)	C _{www} (pF Max)	DCR (Max)		PRI Pins	HI-POT (Vrms)
					PRI	SEC		
S5833H LF	1CT: 2CT	1.20	0.55	30	0.70	1.10	(1-5)	3000

Schematic

Mechanical

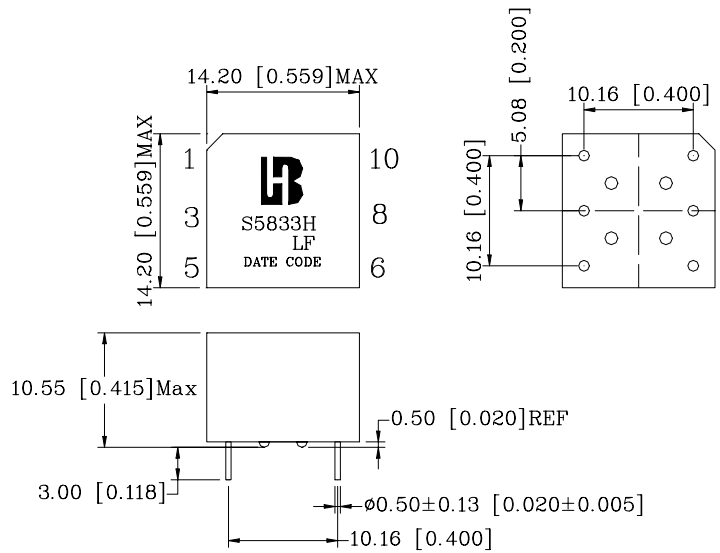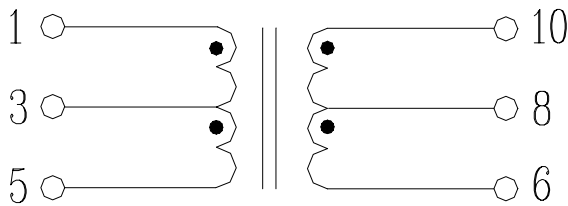

Units: mm[Inches] Tolerances: xx.x0±0.25[0.010]
0.xx±0.05[0.002]