

T1/CEPT/ISDN-PRI TRANSFORMER

P/N: TS416 DATA SHEET


A. GENERAL SPECIFICATIONS:

1. SMALL OUTLINE SURFACE MOUNT PACKAGE.
2. DUAL PACKAGE CONTAINS BOTH TRANSMIT & RECEIVE TRANSFORMERS
3. MODELS MATCHED TO LEADING TRANSCEIVER ICs
4. 1500Vrms ISOLATION VOLTAGE.

B. ELECTRICAL SPECIFICATIONS: (@25°C)

1. OCL INDUCTANCE: 22mH MIN PIN10-6 @ 10KHz/0.2V
2. LEAKAGE INDUCTANCE: 5uH Max PIN 10-6 (2-4,1-5 SHORT)@100KHz/0.2V
3. Cw/w: 80pF Max PIN 10-1(2,4SHORT) @100KHz/0.2V
4. CD: 22pF Max PIN 10-6 @100KHz/1V
4. TURN RATIO (PRI: SEC ±1%): 1-5(2-4 SHORT): 10-6=2:1
5. DC RESISTANCE: 2.9Ω MAX PIN 10-6 & 5.8Ω MAX PIN 1-5 (2,4 SHORT)
7. HI-POT: 1500Vrms PIN 10-1(2,4 SHORT)
8. PRIMARY PINS: 10-6

C. DIMENSIONS & SCHEMATIC & MARKING (UNIT: mm) Tolerance: +/-0.25

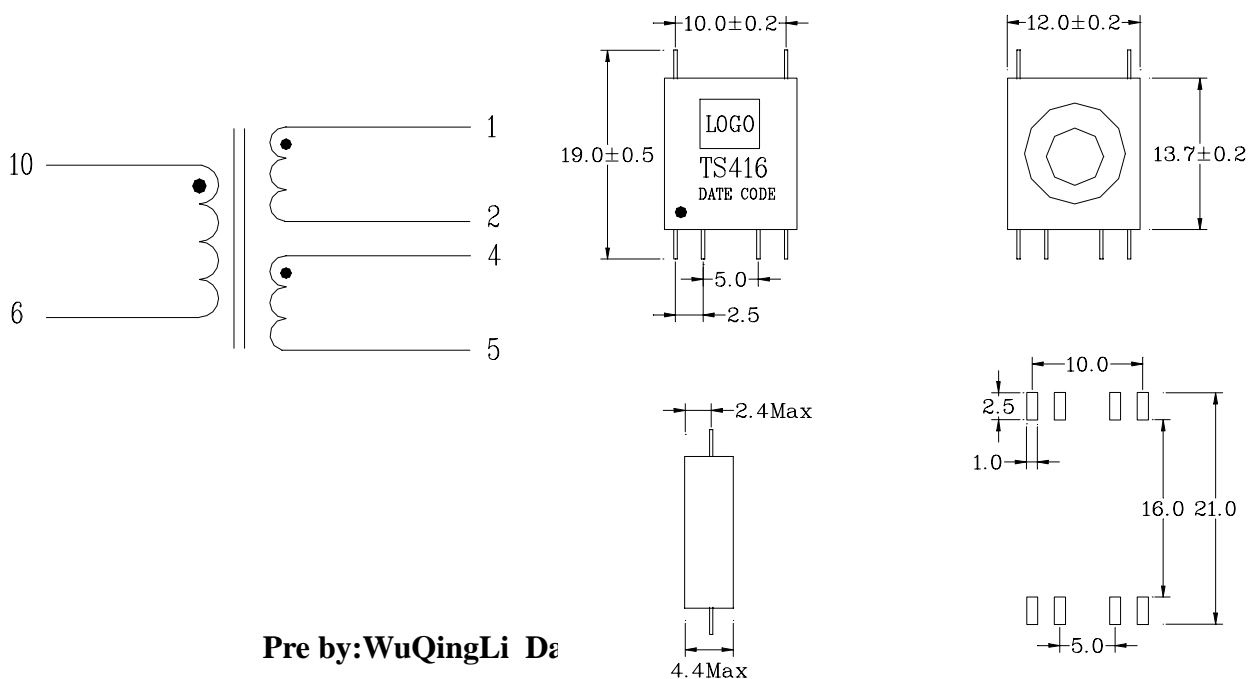

Pre by: WuQingLi Dæ